


DRY AIR GENERATOR

MODEL KDR series

MODEL KHA series

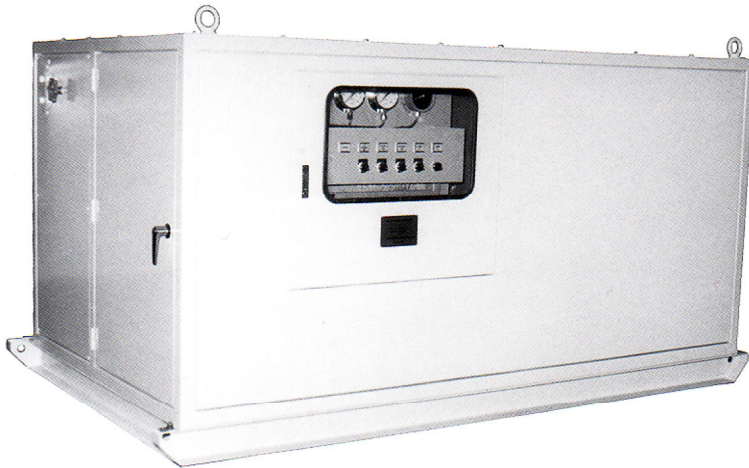

System supplies super dried air its dew point-50 °C or more continuously for semi-assembled transformer, semi-conductor room etc where any humidity is strictly prohibited. KATO's exclusive four steps heatless drying system with combination of Air Compressor can offer best performance at any site conditions.

Model KDR series

consists of refrigerated pre-dryer and heatless dryer with air compressor.

Model KHA series

consists of fine tube type cooler and heatless dryer with air compressor.

SPECIFICATIONS

| Model | Air Volume NM3/M | Compressor KW | Dryer KW | Connection inch | Dimension cm | | | Net weight kg |
|-------|---------------------|------------------|-------------|--------------------|-----------------|-----|-----|------------------|
| | | | | | L | W | H | |
| KDR-1 | 1 | 7.5 | 1.6 | 3/4" | 220 | 170 | 180 | 1550 |
| KDR-3 | 3 | 22 | 2.0 | 1-1/2" | 240 | 170 | 190 | 2400 |
| KDR-5 | 5 | 37 | 3.8 | 2" | 280 | 180 | 190 | 2550 |
| KHA-1 | 1 | 7.5 | 0.85 | 3/4" | 200 | 160 | 170 | 1250 |
| KHA-3 | 3 | 22 | 1.25 | 1-1/2" | 240 | 170 | 190 | 2350 |
| KHA-5 | 5 | 37 | 2.3 | 2" | 280 | 180 | 190 | 2400 |

KATO ELECTRIC MFG. CO.,LTD.

Ebara 2-17-19, Shinagawa-ku, Tokyo, JAPAN

Tel : 81-3-3783-5761 Fax : 81-3-3784-6309

Email : LEJ00075@nifty.com

URL : <http://www.katofl.com>